

# Condensate treatment



Pure air . Pure gas

The Pneumatech ECOBOX offers a compressor condensate cleaning solution with excellent performance for compressed air systems up to 30l/s (60 cfm). It is designed to remove the oil traces from compressor condensate via adsorption. The ECOBOX is able to clean the compressor condensate to oil concentrations below 15 ppm\* by using a new, advanced filter medium. General country legislations for oil in water contamination are 20 ppm\*. It is specifically designed to offer an affordable condensate cleaning solution for piston compressor and small screw compressor installations.



## ECOBX

ECOBX			
Capacity	30 cfm - 900 l/min	50 cfm - 1500 l/min	60 cfm - 1800 l/min
Oil Residual	15 ppm	15 ppm	15 ppm
Expected Life Time - Cold climate **	6000***	4000***	3000***
Expected Life Time - Normal climate **	6000***	4000***	-**
Expected Life Time - Hot climate **	4000***	-**	-**
Suitable compressor	Piston Compressor 2 – 7,5 hp	Screw Compressor 3 – 10 hp	Screw Compressor 15 hp
Electricity Connection	Not Required	Not Required	Not Required
Common Applications	Car Service, car washes, warehouse, fuel stations, handyman workshops	Small general industry, medium sized workshops, dry cleaning, large car washes	Truck repairs shops, small general industry

Important features & benefits
<b>Environmentally friendly</b> - All materials are 100% recyclable
<b>Economic</b> - avoiding collection and treatment by a costly external company
<b>Compact footprint</b> - compact and lightweight design, optimized for small compressor installations
<b>Excellent performance</b> - thanks to the use of advanced absorption media
<b>Quick and easy installation and replacement</b> - by means of a wall or plate mounting bracket
<b>Clean water</b> - After separation, water contains oil levels below 15 ppm*
<b>Easy sampling kit available</b> - option with easy sampling kit to verify outlet concentration on a regular base

Options	Model
Easy sampling kit available Available with easy sampling kit to verify outlet concentration	•
Wall Mounting Kit	✓

- ✓ Standard
- Optional



# Total simplicity

1. Condensate enters the ECOBOX via the inlet connection at the top.
2. During the pre-filtration the oil-water mixture seeps through a polypropylene based filter media, absorbing and capturing the oil but not the water.
3. In a second post filtration stage the remaining oil is adsorbed by an advanced new filter media.
4. Clean condensate exits from the outlet with almost no residual oil content, enabling it to be discarded into the sewage without worries.
5. The Anti-siphon vent prevents the separator from being completely drained once a flow is passing through the outlet connection.
6. Depressurization slits in the ECOBOX top cap allow condensate under pressure to be fed into the separator.
7. Mounting the oil-water separator to the mounting bracket will ensure easy access to the separator as well as a quick replacement.



# Technical data


Type	Rated Flow**				Connections				Weight		Dimensions					
											mm			in		
	l/s	m <sup>3</sup> /h	l/min	cfm	Inlet		Outlet		kg	lbs	A	B	C	A	B	C
ECOBX	< 30	< 54	<900	<60	6 mm	1/4"	10 mm	3/8"	1	2.2	240	140	140	9.5	5.5	5.5

\* 15ppm is generally well below the acceptance level for disposal in the sewage, but due to strongly varying international and local regulations, it is the user's responsibility to consult local waste water discharge regulations and ensure compliance.

\*\* In tropical climates (high ambient temperatures and humidity levels), the air generally contains more water vapor. The extra condensate, generated during the compression and cooling process of the air, shortens the contact time in the device, leaving less time for the media to absorb the oil. Climatic conditions used in the table above are defined as follows:

- Cold climate conditions: average ambient temperature of 20 °C – relative humidity of 50 %
- Normal climate conditions: average ambient temperature of 25 °C – relative humidity of 60 %
- Hot climate conditions: average ambient temperature of 35 °C – relative humidity of 70 %

\*\*\* The ECOBOX is designed for mineral-based lubricants, which are generally used. It should not be used with synthetic polyglycol (PAG) lubricants due to its increased solubility in water.

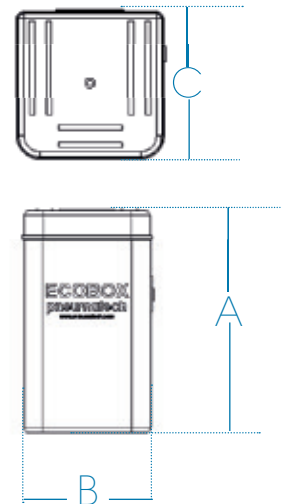

Pneumatech reserves the right to change or revise specifications and product design in connection with any features of our products. Such changes do not entitle the buyer to corresponding changes, improvements, additions or replacements for equipment previously sold or shipped.

6999900190 © 2015 Pneumatech. All rights reserved.

