

FLOOR-STANDING CABINETS AND OPEN RACKS

info@fracksystems.se
+46 854063722



SZB IT

SZE2 PC

SJB

SRD

SRX

FLOOR-STANDING CABINETS AND OPEN RACKS

SZB IT 19" NETWORK/SERVER CABINETS



STANDARD CABINETS WITH FRONT GLASS DOOR WITH METAL SIDES

available in constant supply from warehouse



SCOPE OF DELIVERY

- Dismountable frame (bottom plate, top plate, four posts).
- Front glass door with metal sides and lock with swing handle; cabinets 45 or 42 U high have a three-point lock, cabinets 24 U high have a single-point lock.
- Rear solid steel, shortened door with single-point locks without handle; 3U cable entry panel with a brush strip, mounted under the shortened door.
- Two solid steel side panels with single-point locks.
- Two pairs of 19" mounting profiles, stepless adjustable.
- Earthing bar and earthing cables for doors and side panels.
- Four levelling feet.



TECHNICAL DATA

Material

Frame, side panels, solid steel door, mounting profiles, C-profiles - sheet steel

Door with glass - sheet steel, clear mineral safety glass
Outriggers - zamak casting

Protection degree

IP 20 in accordance with EN 60529
(does not apply to brush cable entries).

Surface finishing

Frame, doors, side panels
- powder paint, light grey (RAL 7035)
Mounting profiles, C-profiles
- Al-Zn coated

Maximum permissible load

See page 22



1000 kg

ADVANTAGES

- Cable openings in the top and bottom plates, 71 mm wide, what allows to put through the power cable with three-phase plug.
- All openings in the top and bottom plates blanked with knock-out blanking plates.
- U-marking on the mounting profiles.
- Maximum opening angle for front door – 180°
- Possibility to change door opening's direction.
- Possibility to put the cabinet directly on the floor (no protruding elements under the cabinet).
- Adaptation for bying the cabinets in the rows and Data Box creation (cold/hot aisle - see page 105).


ACCESSORIES from page 45

- **Roof** page 50
- **Plinth, castors** page 46
- **Fan units** page 76
- **Blanking and cable entry plates** page 63
- **Power strips** page 86
- **Shelves** page 51


REFERENCE CHART

Height [U]	Width [mm]	Depth [mm]	RAL colour	Catalogue number
45 U	800	800	7035	WZ-IT-458080-69AA-2-011
	600	600	7035	WZ-IT-456060-69AA-2-011
42 U	800	800	7035	WZ-IT-428080-69AA-2-011
		600	7035	WZ-IT-428060-69AA-2-011
	600	800	7035	WZ-IT-426080-69AA-2-011
		600	7035	WZ-IT-426060-69AA-2-011
24 U	800	800	7035	WZ-IT-248080-69AA-2-011
		600	7035	WZ-IT-248060-69AA-2-011
	600	800	7035	WZ-IT-246080-69AA-2-011
		600	7035	WZ-IT-246060-69AA-2-011

Other available configurations are presented on pages 22-23

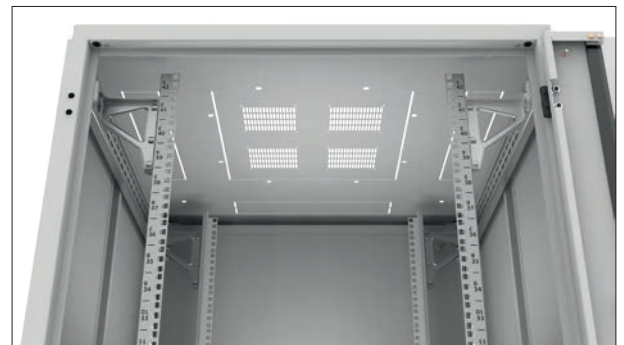

View on the top plate

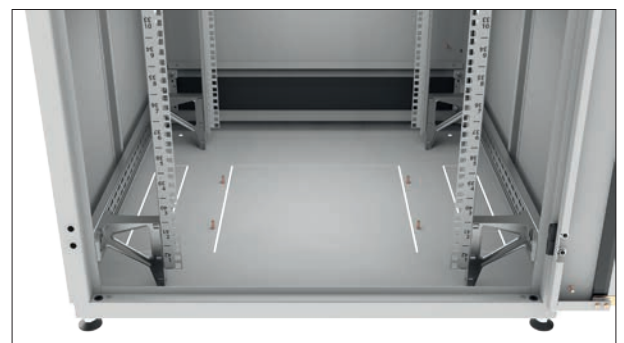

View on the bottom plate. Under the rear door is mounted 3U cable entry panel with a brush strip.

NETWORK/SERVER CABINETS **SZB IT 19"**



Hinges enabling opening door by 180°

Cabinet 600 mm wide



Three-point rod-latch lock with a swing handle

Additional holes under the hinges, allowing change the door opening direction

180°



Cabinet 800 mm wide



Holes for baying cabinets in a row

U-marking on the mounting profiles



See the video: zpas.pl/qr/f10

SZB IT 19" NETWORK/SERVER CABINETS



STANDARD CABINETS WITH PERFORATED STEEL DOOR available in constant supply from warehouse



SCOPE OF DELIVERY

- Dismountable frame (bottom plate, top plate, four posts).
- Front and rear door steel perforated (clearance 80%) with three-point lock with swing handle.
- Two solid steel side panels with single-point locks.
- Two pairs of 19" mounting profiles, stepless adjustable.
- Earthing bar.
- Earthing cables for doors and side panels.
- Four levelling feet.



TECHNICAL DATA

Material

Frame, side panels, doors, mounting profiles,
C-profiles - sheet steel
Outriggers - zamak casting



1360 kg

Protection degree

IP 20 in accordance with EN 60529
(does not apply to brush cable entries).

Surface finishing

Frame, doors, side panels
- powder paint, light grey (RAL 7035) or black (RAL 9005)
Mounting profiles, C-profiles
- Al-Zn coated

Maximum permissible load

See page 22

ACCESSORIES from page 45

- **Roof** page 50
- **Plinth, castors** page 46
- **Fan units** page 76
- **Blanking and cable entry plates** page 63
- **Power strips** page 86
- **Shelves** page 51

REFERENCE CHART

Height [U]	Width [mm]	Depth [mm]	RAL colour	Catalogue number
42 U	800	1000	7035	WZ-IT-428010-44AA-2-011
			9005	WZ-IT-428010-44AA-2-161
	600	1000	7035	WZ-IT-426010-44AA-2-011
			9005	WZ-IT-426010-44AA-2-161


Other available configurations are presented on pages 22-23

ADVANTAGES

- Cable openings in the top and bottom plates, 71 mm wide, what allows to put through the power cable with three-phase plug.
- All openings in the top and bottom plates blanked with knock-out blanking plates.
- U-marking on the mounting profiles.
- Maximum opening angle for front and rear door – 180°
- Possibility to change door opening's direction.
- Possibility to put the cabinet directly on the floor (no protruding elements under the cabinet).
- Adaptation for bying the cabinets in the rows and Data Box creation (cold/hot aisle - see page 105).



View on the top plate

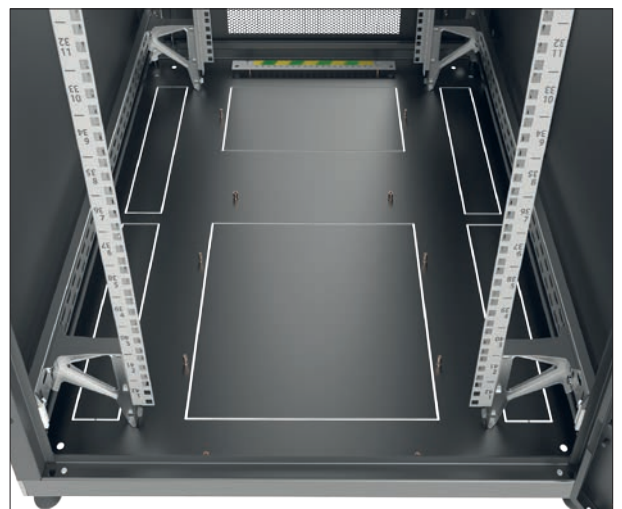

View on the bottom plate

NETWORK/SERVER CABINETS **SZB IT 19"**



Hinges enabling opening door by 180°


Cabinet 600 mm wide



Three-point rod-latch lock with a swing handle

Additional holes under the hinges, allowing change the door opening direction

180°

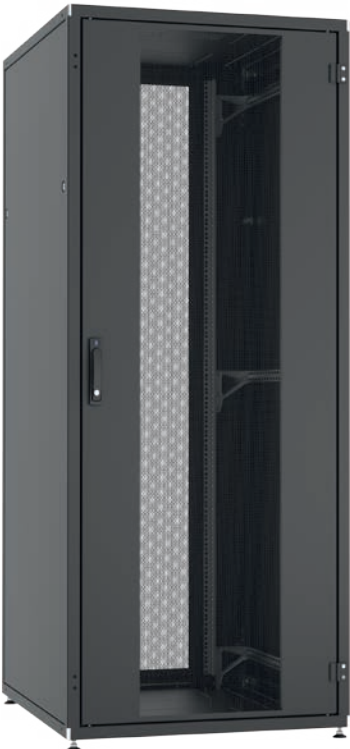



Cabinet 800 mm wide



Holes for buying cabinets in a row

U-marking on the mounting profiles













SZB IT 19" NETWORK/SERVER CABINETS




DESIGN

1. Frame's post
3. Frame's bottom plate
4. Frame's top plate
5. Adjustable feet
6. C-profile
7. Outtrigger
8. Mounting profile
9. Earthing bar
10. Knock-out blanking plate 380 x 380 mm
12. Knock-out blanking plate 380 x 71 mm

Note:
The cabinet in the drawing is shown without any panels or doors.

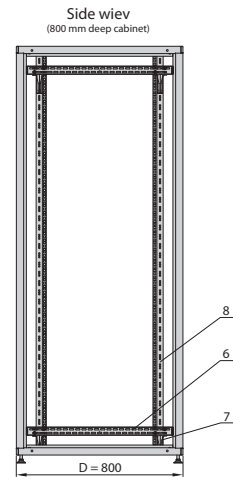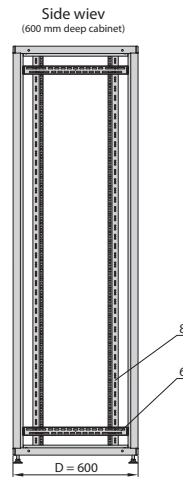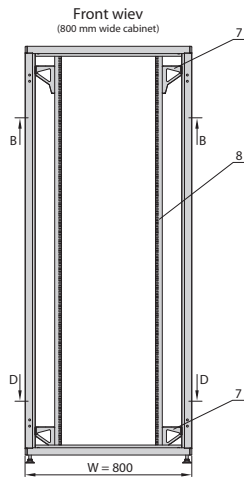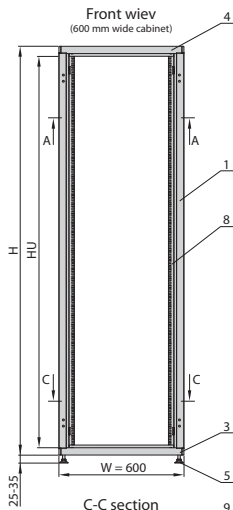

NETWORK/SERVER CABINETS **SZB IT 19"**


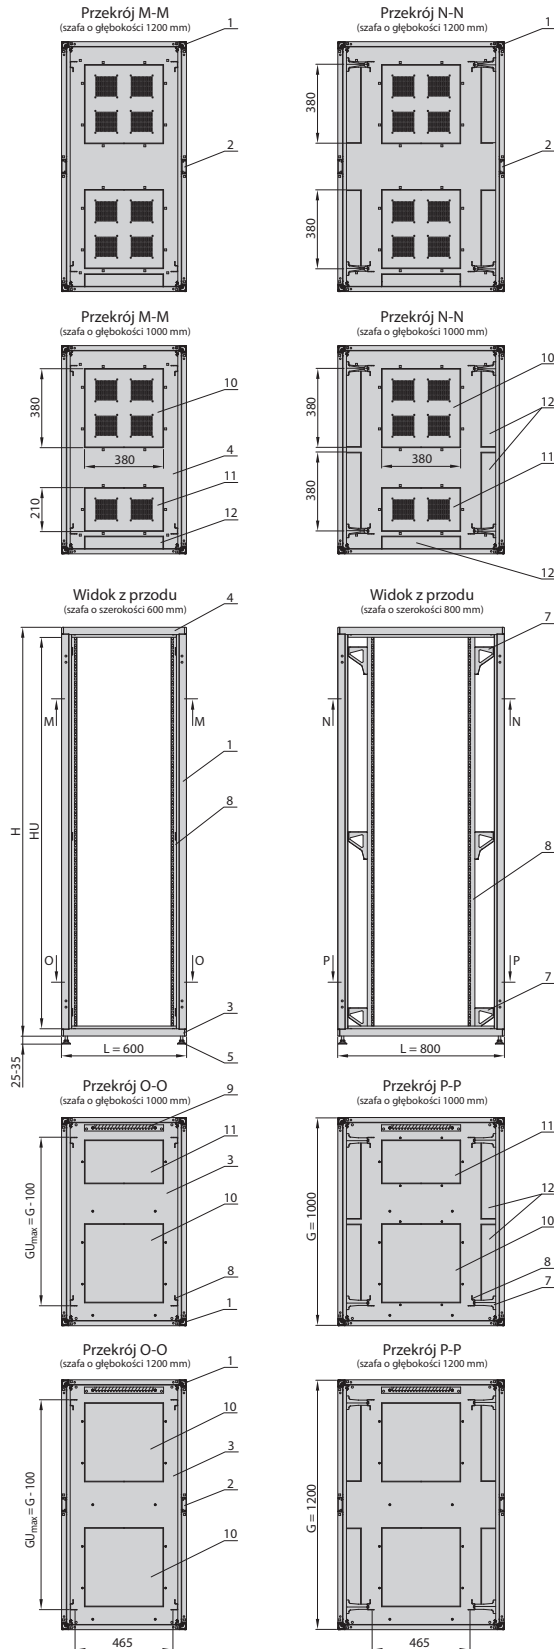


DESIGN

1. Frame's post
2. Frame's middle post
3. Frame's bottom plate
4. Frame's top plate
5. Adjustable feet
6. C-profile
7. Outrigger
8. Mounting profile
9. Earthing bar
10. Knock-out blanking plate 380 x 380 mm
11. Knock-out blanking plate 380 x 210 mm
12. Knock-out blanking plate 380 x 71 mm

Note:

The cabinet in the drawing is shown without any panels or doors.



SZB IT 19" NETWORK/SERVER CABINETS

CABINET CONFIGURATOR

REFERENCE CHART

Width W [mm]	Depth D [mm]	Reference number					
800	800	—	458080	428080	338080	248080	188080
	600	—	458060	428060	338060	248060	188060
	1000	478010	458010	428010	—	248010	—
	1200	478012	458012	428012	—	—	—
600	800	—	456080	426080	336080	246080	186080
	600	—	456060	426060	336060	246060	186060
	1000	476010	456010	426010	—	246010	—
	1200	476012	456012	426012	—	—	—
Usable height HU [U = 44.45 mm]		47 U	45 U	42 U	33 U	24 U	18 U
Frame height H [mm]		2186	2096	1963	1563	1163	896

Note: Cabinets available in constant supply from warehouse are listed and described on pages 16-19.

CATALOGUE NUMBER OF SZB IT CABINET

WZ-IT-XXXXXX-XXXX-X-XXX

Reference number
specifies the cabinet's overall dimensions (see reference chart).

Cabinet's colour:
011 - RAL 7035 161 - RAL 9005

Layout of mounting profiles or mounting angles inside the cabinet:
1 - two pairs of 19" mounting profiles and one pair of middle mounting profiles
2 - two pairs of 19" mounting profiles
3 - two pairs of 19" mounting angles

| F - FRONT | R - REAR |


Door or panel types:
0 - without door or without panel
2 - single-leaf solid steel door with lock with swing handle
3 - double-leaf solid steel door with lock with swing handle
4 - single-leaf perforated door (80% clearance) with lock with swing handle
5 - double-leaf perforated door (80% clearance) with lock with swing handle
6 - glass door with metal sides and lock with swing handle
8 - steel door with glass and lock with swing handle
9 - solid steel, shortened door with single-point locks without handle and 3U cable entry panel with a brush strip, mounted under the shortened door
A - solid steel panel with single-point locks

Maximum door opening angle: 2, 3, 4, 5, 6, 8 – 180° 9 – 110°

Type of lock with handle:

Cabinets height: 33-47 U
- three-point rod-latch lock

Cabinets height: 18-24 U
- single-point lock



| LS - LEFT SIDE | RS - RIGHT SIDE |

Side panel types:
0 - without any panel
A - solid steel door with single-point locks
B - perforated steel panel (80% clearance) with single-point locks

Note:
The delivery of each SZB IT cabinet (except for elements listed in cat. no.) includes the following: four levelling feet, earthing bar and earthing cables for door and side panels. Other equipment (roof, plinth, castors, blanking and cable entry plates, shelves etc.) are ordered separately - see pages 45-102.

Maximum load capacity for SZB IT cabinets

The maximum weight of equipment mounted in SZB IT cabinets is:
1000 kg* - for cabinets' depth 600 or 800 mm for all heights based on levelling feet, plinth or directly on the floor
- for cabinets' depth 1000 mm and height 24U based on levelling feet, plinth or directly on the floor
1360 kg* - for cabinets' depth 1000 or 1200 mm based on levelling feet, plinth or directly on the floor (except height 24U)
150 kg - for cabinet with castors type 150
500 kg - for cabinet with castors type 300

* Declared carrying capacity is valid if maintaining the maximum distance between mounting profiles on the depth and even loading.

NETWORK/SERVER CABINETS **SZB IT 19"**

CABINET CONFIGURATOR

AVAILABLE DOOR TYPES AND PANELS



180°

[2] Single-leaf solid steel door



180°

[3] Double-leaf solid steel door



180°

[4] Single-leaf perforated door (80% clearance)



180°

[5] Double-leaf perforated door (80% clearance)



180°

[6] Glass door with metal sides



180°

[8] Steel door with glass



110°

[9] Solid steel, shortened door + 3U cable entry panel with a brush strip



[A] Solid steel panel