

GEMÜ



Measurement and display units



Various methods of measuring for different areas of application

In addition to process valves, GEMÜ provides an entire series of measurement and display units for valves. The current product range includes various flowmeters as well as a selection of technologies for temperature, pressure and level measurement systems. The portfolio is complimented by display units for sensor systems.


For flow measurement systems, GEMÜ offers a variety of designs: variable area flowmeters, flow transmitters, magnetically inductive flowmeters and ultrasonic flowmeters.

All measurement devices have in common that they are characterised with a robust construction and are simple to integrate into a system.



Table of contents

Flow measurement systems	4- 8
Pressure measurement systems	9- 11
Worldwide Service	12
Temperature measurement systems	13

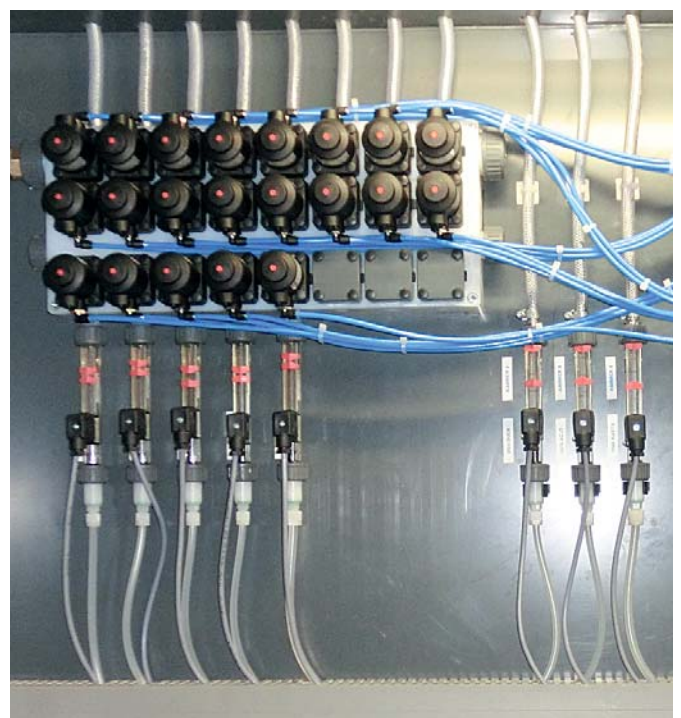

Flow measurement systems

A measuring float is lifted by the volumetric flow in a conical metering tube until equilibrium is achieved between the weight of the measuring float and the force caused by the flow resistance. The measuring float is lifted higher or lower according to the volume flow rate.

GEMÜ 800/850

Features

- Variable area principle
- For corrosive, inert gaseous and liquid media
- Corrosion resistant, robust and high chemical resistance
- Optional electrical limit switches or instrument sensor

Technical specifications:

Tube material:	Trogamid-TTM, polysulphone, PVC, PVDF
Measuring range:	From 2 l/h to 20,000 l/h for liquids and 0.2 Nm ³ /h to 450.0 Nm ³ /h for air
Available sizes:	DN 10 to 65
Connection:	By union ends with insert



GEMÜ 840

Features

- Part flow principle
- Consists of main flow unit, orifice plate, part flow unit, manual diaphragm valves
- For corrosive and inert liquid media
- Robust, high chemical resistance
- Optional electrical limit switches or instrument sensor

Technical specifications:

Housing material :	PVC-U, grey, PP
Measuring range:	From 3,000 l/h to 50,000 l/h
Available sizes:	DN 65
Connection:	By solvent cement or welded spigots



GEMÜ 1250/1251/1252/1256/1257

Limit switches


Features

- Suitable for GEMÜ flowmeters with magnetic float
- Simple mounting and setting by clamping to flowmeter
- Reed contacts are actuated by the magnet in the float

Technical specifications:

GEMÜ 1250: With bistable reed contact with SPDT (Single Pole Double Throw) contact

GEMÜ 1251 - 1257: With bistable reed contact for Min or Max limit value

Option: ATEX 



GEMÜ 1270-1273

Instrument sensors

Features

- Suitable for GEMÜ flowmeters with magnetic float
- For continuous flow monitoring
- Simple mounting and setting by clamping to flowmeter
- Reed contacts in a chain of resistors are actuated by the magnet in the float

Technical specifications:

GEMÜ 1270/1271: The signal reading is effected via voltage divider (0-10kOhm)

GEMÜ 1272/1273: The signal reading is effected via integrated 2-wire measuring transducer (4-20mA)

GEMÜ 1270/1271: ATEX optional 



Flow measurement systems

Turbine flow transmitters

These can be used either as pure measuring turbines or as totalizers or batch controllers for measuring ranges from 120 to 25,000 l/h. The measuring turbines provide various electrical output signals for further processing.

GEMÜ 3020

Flow transmitter (Turbine)

Features

- For inert and corrosive aqueous liquids
- Connection by metric or imperial union ends with insert

Technical specifications:

Turbine material :	PVDF
Turbine body material:	PVDF / PVC-U, grey
Available sizes:	DN 25 / DN 50
Measuring range:	DN 25: 120 to 3600 l/h DN 50: 500 to 25000 l/h
Power supply:	24 V DC
Frequency output:	24 V PNP
Current output:	4 to 20 mA

GEMÜ 3021

Flow transmitter, totalizer or batch controller

Features

- Measuring transducer with totalizer or batch controller
- For inert and corrosive aqueous liquids
- Electronic system enables adjustment to operating conditions
- Signal inputs for PLC or switching signals
- Connection by metric or imperial union ends with insert

Technical specifications:

Turbine material :	PVDF
Turbine body material:	PVDF / PVC-U, grey
Available sizes:	DN 25 / DN 50
Measuring range:	DN 25: 120 to 7200 l/h DN 50: 500 to 25000 l/h
Power supply:	24 V DC
Outputs depending on type:	Frequency 24 V PNP; current 0/4 to 20 mA; 2 x relay



Magnetically inductive flowmeter

The GEMÜ 3030 mFlow flowmeter operates according to the magnetically inductive measurement principle. It is suitable for electrically conductive media and enables exact measurement of flow velocities and flow rates of inert and corrosive liquids. The simple mechanical construction of the GEMÜ 3030 mFlow magnetically inductive immersion-type flowmeter offers quick and easy installation. The device has a backlit display and is operated via a membrane key-pad at the front of the housing. Electrical connections are at the rear.

GEMÜ 3030 mFlow

Features

- Same measurement device can be used for different nominal sizes
- No moving parts in the medium
- Access rights via different user levels
- Integrated Web browser capability
- Simple commissioning and versatile operating facilities
 - Fascia keys
 - PC connection with Internet browser
 - Fieldbus interfaces e.g. Profibus-DP

Technical specifications:

Available sizes:	DN 25 to 300
Temperature range:	0 to 135 °C
Connection:	By various fittings
Temperature sensor:	optional
Power supply:	24 V DC
Measuring range:	0 to 4 m/s, 0 to 10 m/s
Output signals:	0 / 4 to 20 mA; pulse; relay
Fieldbus interface:	Profibus DP
Conductivity of medium:	$\geq 20 \mu\text{S/cm}$



Flow measurement systems

Ultrasonic flowmeter

The GEMÜ C38 SonicLine is an ultrasonic flowmeter operating according to the phase difference method. The metering tube is made of PFA and can be directly integrated into the piping system by standard flare unions. The medium only contacts the metering tube. The electronic housing is made of PP. The connection cables are PTFE encapsulated.

GEMÜ C38 SonicLine

Features

- High accuracy and repeatability
- Suitable for very dynamic processes (dosing time < 1s)
- Integrated dosing function
- No moving parts in the metering tube and thus subject to low wear
- All media wetted parts are made of PFA (HP quality)
- Excellent chemical resistance
- Minimal deadleg
- Empty pipe signal
- Compact design

Technical specifications:

Nominal size :	3/8" to 1"
Measuring range:	0.03 to 120 l/min
Connection:	Flare connection
Tube material:	PFA-HP
Power supply:	24 V DC
Media temperature:	0 to 80 °C
Accuracy:	± 1 % of measuring range
Output signals:	4 to 20 mA; pulse



Pressure measurement systems

The GEMÜ 3140 pressure transducer or pressure switch is available in various different designs for the pressure measurement systems area. The HydraLine® series (GEMÜ C30, C31, C32) comprises pressure transmitters and pressure measurement devices for high purity media applications.

GEMÜ 3140

Pressure transducer/switch

Features

- Rotatable LED display and IO-Link interface, depending on version
- Suitable for highly viscous, contaminated and corrosive media
- Appropriate in-line housing optionally available
- ATEX and SIL2 design optionally available
- Accuracy: 0.5% FSO (in accordance with IEC 60770)
- Optional installation position
- Ceramic sensor

Technical specifications:

Operating pressure*:	0 to 40 bar
Media temperature*:	-40 to 125 °C
Housing materials:	Housing made from 1.4404 stainless steel or plastic (PVDF)
Mechanical connection:	G¼" or G½" male thread
Output signals:	0–20 mA, 4–20 mA, 0–10 V
Switching outputs:	PNP or NPN

* Depending on version and/or operating parameters



Pressure measurement systems

GEMÜ C30 Hydra-Gauge

Pressure gauge

Features

- Especially suitable for pressure measurement of ultra high purity chemicals
- All media wetted parts are made of PFA/PTFE (HP quality)
- Pressure transmission by double diaphragm technology
- Pressure gauge can be rotated through 360°
- Optionally with electrical switching contacts
- REACH / ROHS compliant
- Other certificates on request (e.g. FDA compliance)

Technical specifications:

Nominal size :	¼" to 1¼" (In-Line, Dead-End)
Operating pressure:	0 to 6 bar
Connection:	Flare connection, NPT
Valve body material:	PFA-HP, PTFE
Diaphragm material	PFA
Media temperature:	5 to 60 °C
Accuracy:	± 1,6 % of measuring range or scale end value



GEMÜ C31 Hydra-Sensor Pressure transmitter

Features

- Especially suitable for pressure measurement of ultra high purity chemicals
- All media wetted parts are made of PFA/PTFE (HP quality)
- Pressure transmission by double diaphragm technology
- Pressure transmitter can be rotated through 360°
- Protection class IP 65 or IP 67 (depending on version)
- REACH / ROHS compliant
- Other certificates on request (e.g. FDA compliance)

Technical specifications:

Nominal size :	¼" to 1¼" (In-Line, Dead-End)
Operating pressure:	0 to 6 bar
Connection:	Flare connection, NPT
Valve body material:	PFA-HP, PTFE
Diaphragm material	PFA
Power supply:	10 to 30 V DC
Media temperature:	5 to 60 °C
Accuracy:	≤0.5 % of measuring span
Output signals:	4 to 20 mA
Option:	Digital display



GEMÜ C32 Hydra-Dry Measuring transducer with ceramic sensor

Features

- Especially suitable for pressure measurement of ultra high purity chemicals
- All media wetted parts are made of PFA/PTFE (HP quality)
- The pressure is transmitted by a ceramic sensor
- The sensor is isolated from the process by a double diaphragm system
- Protection class IP 67
- REACH / ROHS compliant
- Other certificates on request (e.g. FDA compliance)

Technical specifications:

Nominal size:	¼" to 1¼" (In-Line, Dead-End)
Operating pressure:	0 to 6 bar
Connection:	Flare connection, NPT
Valve body material:	PFA-HP, PTFE
Diaphragm material	PFA
Power supply:	12 to 30 V DC
Media temperature:	0 to 60 °C
Accuracy:	≤0.5 % of measuring span
Output signals:	4 to 20 mA
Option:	Digital display with switch points



Worldwide presence

AUSTRALIA

GEMÜ Australia Pty. Ltd
Unit 4 - 8/10 Yandina Road
West Gosford, NSW 2250
Phone: +61-2-43 23 44 93
Fax: +61-2-43 23 44 96
mail@gemu.com.au

AUSTRIA

GEMÜ GmbH
Europaring F15 401
2345 Brunn am Gebirge
Phone: +43 22-36 30 43 45-0
Fax: +43 22-36 30 43 45-31
info@gemue.at

BELGIUM

GEMÜ Valves bvba/sprl
Koning Albert 1 laan, 64
1780 Wemmel
Phone: +32 2 702 09 00
Fax: +32 2 705 55 03
info@gemue.be

BRAZIL / SOUTH AMERICA

GEMÜ Indústria de Produtos
Plásticos e Metalúrgicos Ltda.
Rue Marechal Hermes, 1141
83.065-000 São José dos
Pinhais, Paraná
Phone: +55-41-33 82 24 25
Fax: +55-41-33 82 35 31
gemu@gemue.com.br

CANADA

GEMÜ Valves Canada Inc.
2572 Daniel-Johnson Boulevard
Laval, Quebec
H7T 2R8
Phone: +1-450-902-2690
Fax: +1-404-3 44 4003
info@gemu.com

CHINA

GEMÜ Valves (China) Co., Ltd
No.518, North Hengshahe Road
Minhang District, 201108
Shanghai
Phone: +86-21-2409 9878
info@gemue.com.cn

DENMARK

GEMÜ ApS
Industriparken 16-18
2750 Ballerup
Phone: +45 70 222 516
Fax: +45 70 222 518
info@gemue.dk

FRANCE

GEMÜ S.A.S
1 Rue Jean Bugatti
CS 99308 Duppigheim
67129 Molsheim Cedex
Phone: +33-3 88 48 21 00
Fax: +33-3 88 49 12 49
info@gemu.fr

INTERCARAT

1 Rue Jean Bugatti
CS 99308 Duppigheim
67129 Molsheim Cedex
Phone: +33-3 88 48 21 20
Fax: +33-3 88 49 14 82
sales@intercarat.com

GERMANY

GEMÜ Gebr. Müller GmbH & Co. KG
Fritz-Müller-Straße 6 - 8
74653 Ingelfingen-Criesbach
Postfach 30
74665 Ingelfingen-Criesbach

Phone: +49 (0)7940-12 30
Fax: +49 (0)7940-12 31 92
(Domestic)
Fax: +49 (0)7940-12 32 24
(Export)
info@gemue.de

GREAT BRITAIN / UK

GEMÜ Valves Ltd.
10 Olympic Way
Birchwood, Warrington
WA2 0YL
Phone: +44-19 25-82 40 44
Fax: +44-19 25-82 80 02
info@gemu.co.uk

HONG KONG

GEMÜ (Hong Kong) Co., Ltd.
Room 2015, Tower B,
Regent Centre,
70 TA Chuen Ping Street
Kwai Chung, N.T., Hong Kong
P.R. China
Phone: +852 6873 8280
Fax: +852 6873 8280
info@gemue.com.cn

INDIA

GEMÜ India
Representative Office
301, K.B. Complex, Rambaug,
L.G.Hospital Road, Maninagar,
Ahmedabad-380 008
Phone: +91-79-25450438
+91-79-25450440
Fax: +91-79-25450439
sales@gemu.in

INDONESIA

GEMÜ Valves Pte Ltd
(Indonesia Representative
Office)
Rukan Mangga Dua Square
Block F17, 2nd Floor
Jl. Gunung Sahari Raya No. 1
Jakarta Utara 14420
Indonesia
Phone: +62 (21) - 6231 0035
Fax +62 (21) - 2907 4643
info@gemu.co.id

IRELAND

GEMÜ Ireland Ltd
15 Eastgate Drive
Eastgate Business Park
Little Island
Co. Cork
Phone: +353 (0)21 4232023
Fax: +353 (0)21 4232024
info@gemu.ie

ITALY

GEMÜ S.r.l.
Via Giovanni Gentile, 3
20157 Milano
Phone: +39-02-40044080
Fax: +39-02-40044081
info@gemue.it

JAPAN

GEMÜ Japan Co., Ltd.
2-5-6, Aoi, Higashi-ku,
Nagoya, Aichi, 461-0004
Phone: +81-52-936-2311
Fax: +81-52-936-2312
info@gemu.jp

MALAYSIA

GEMÜ VALVES PTE LTD
(Malaysia Representative Office)
D-8-09, Block D, No. 2A
Jalan PJU 1A/7A
Oasis Square, Oasis Damansara
47301 Petaling Jaya
Selangor Darul Ehsan
Phone: +(603)- 7832 7640
Fax: +(603)- 7832 7649
info@gemu.com.sg

MEXICO

GEMÜ Valvulas S.A. de C.V.
German Centre,
Av. Santa Fe No. 170 – OF. 5-1-
05
Col. Lomas de Santa Fe,
Del. Alvaro Obregon
01210 Mexico, D.F.
Phone: +52 55 7090 4161
+52 55 7090 4179

RUSSIA

OOO „GEMÜ GmbH“
Uliza Shipilovskaya, 28A
115563, Moskau
Phone: +7(495) 662-58-35
Fax: +7(495) 662-58-35
info@gemue.ru

SINGAPORE

GEMÜ Valves PTE. LTD.
25 International Business Park
German Centre #03-73/75
Singapore 609916
Phone: +65-65 62 76 40
Fax: +65-65 62 76 49
info@gemu.com.sg

SOUTH AFRICA

GEMÜ Valves Africa Pty. Ltd
Stand 379
Northlands Business Park,
Hoogland Ext 45
Northriding, Randburg
Phone: +27(0)11 462 7795
Fax: +27(0)11 462 4226
office@gemue.co.za

SWEDEN

GEMÜ Armatur AB
Box 5
437 21 Lindome
Phone: +46-31-99 65 00
Fax: +46-31-99 65 20
order@gemu.se

SWITZERLAND

GEMÜ GmbH
Seetalstr. 210
6032 Emmen
Phone: +41-41-7 99 05 05
Fax: +41-41-7 99 05 85
info@gemue.ch

GEMÜ Vertriebs AG
Lettenstrasse 3
6343 Rotkreuz
Phone: +41-41-7 99 05 55
Fax: +41-41-7 99 05 85
vertriebsag@gemue.ch

TAIWAN

GEMÜ Taiwan Ltd.
9F.-5, No.8, Ziqiang S. Rd.
Zhubei City
Hsinchu County 302,
Taiwan (R.O.C.)
Phone: +886-3-550-7265
Fax: +886-3-550-7201
office@gemue.tw

UNITED STATES

GEMÜ Valves Inc.
3800 Camp Creek Parkway
Suite 120, Building 2600
Atlanta, Georgia 30331
Phone: +1-678-5 53 34 00
Fax: +1-404-3 44 93 50
info@gemu.com

In addition to these
subsidiaries, GEMÜ has a
global partner network.

Contact details:

https://www.gemu-group.com/en_GB/kontakte/



 GEMÜ manufacturing site

 GEMÜ subsidiary

Temperature measurement systems

Temperature transducer and temperature measurement device with integrated display

The GEMÜ 3220 temperature transducer converts the physical variable temperature proportionally into an electrical signal. The process connection is configured as standard with male threads to DIN 3852 in sizes G 1/2 and G 3/4. The electrical connection is via a plug complying with DIN EN 175301-803 form A. The installation position is optional. After screwing in the connecting element, the upper part of the housing can be rotated up to $\pm 180^\circ$ to the required position by loosening the fastening screws. Media wetted components are made of PVDF or ceramics, the housing is made of ABS and the seal of FPM.

GEMÜ 3220

Features

- High accuracy and repeatability
- No moving parts and thus subject to low wear

Technical specifications:

Measuring range:	0 to 100 °C
Sensor material:	Ceramics (option encapsulated in PVDF)
Connecting element:	PVDF
Version:	2-wire transducer or 4-wire temperature measurement device with display
Current output:	0/4 to 20 mA
Power supply:	24 V DC
Process connection:	Dependent on the version: G 1/2" or G 3/4" thread



GEMÜ Gebr. Müller Apparatebau GmbH & Co. KG
Fritz-Müller-Straße 6-8 · D-74653 Ingelfingen-Criesbach
Phone +49 (0)7940 123-0 · info@gemue.de

www.gemu-group.com