


PORTABLE SOLUTION: "S" SERIES

Telea Tecnovision has developed a portable system ideal for mobile inspection in high temperature environments.



"S" SERIES: BASIC SYSTEM COMPONENTS CONFIGURATION

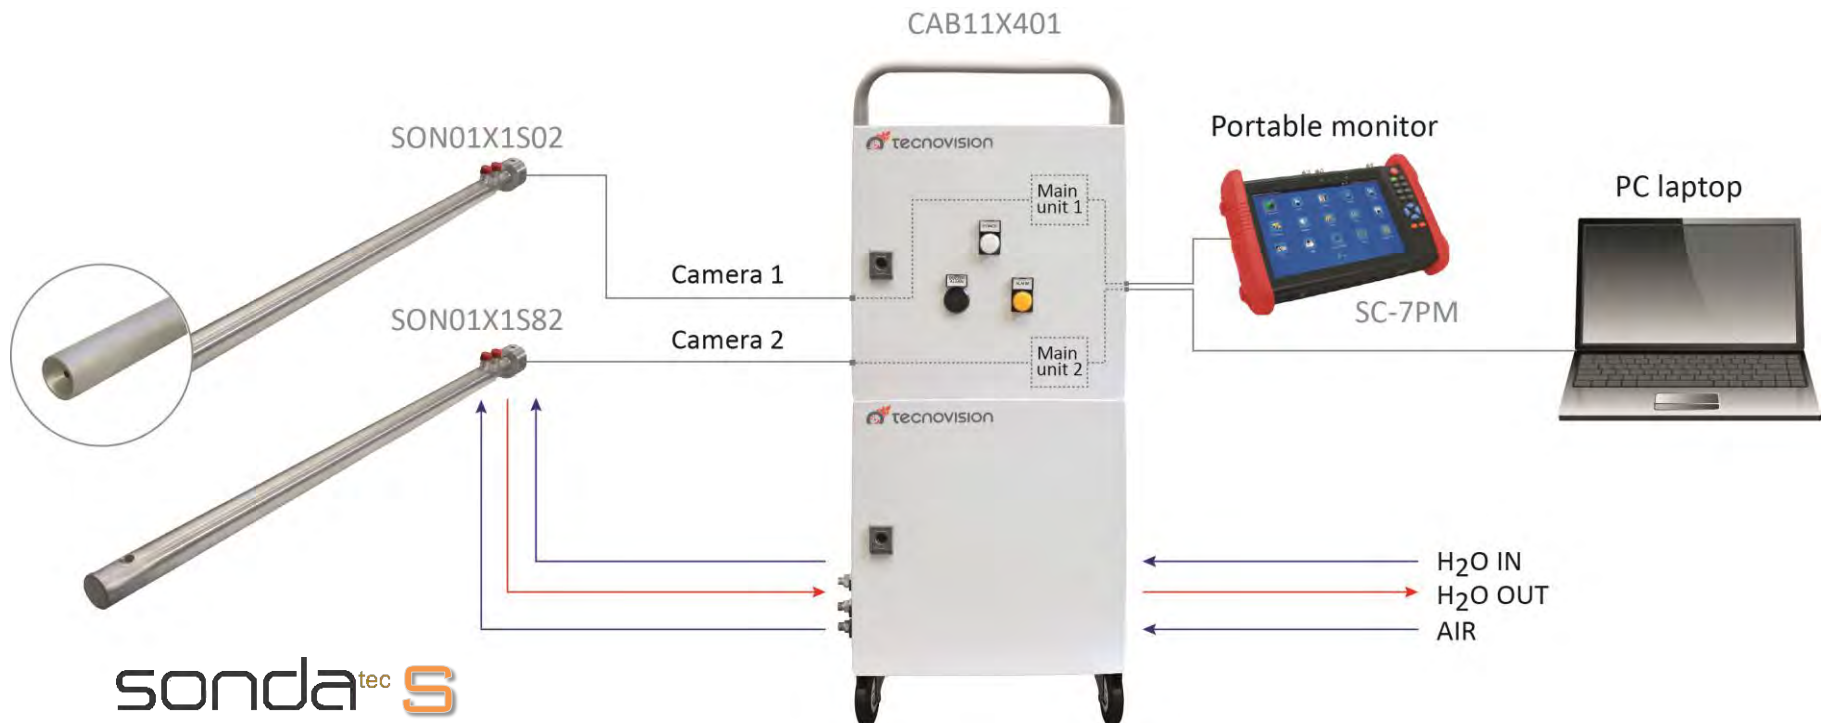

"S" SERIES

- HD ready 1280x720p

cam^{tec} S




- 6mm air pressurized aperture

sonda^{tec} S



- Water cooling circuit made with three jackets




- Housing made of SS316L



- Easy fit all in one camera device




CAMTEC: "S" SERIES CONFIGURATION

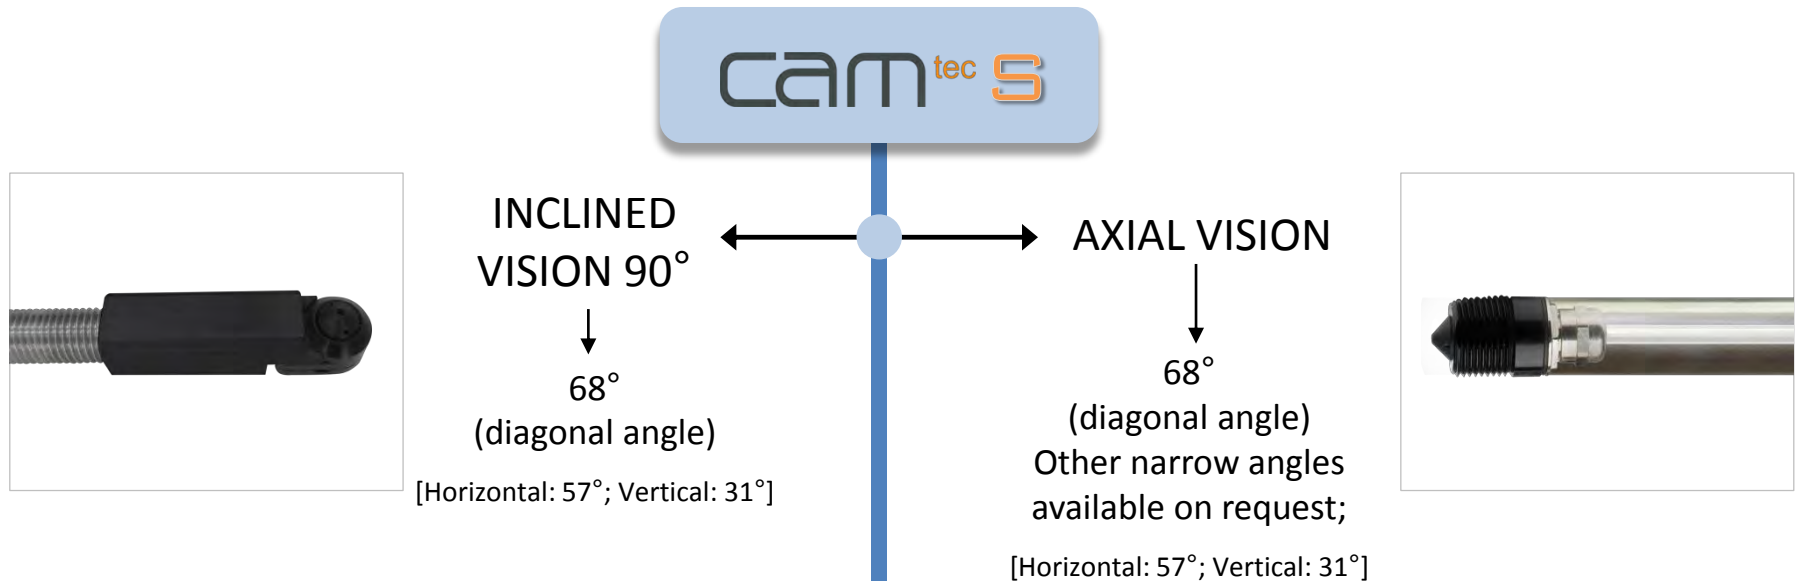

- HD resolution IP camera
- Length = 1200mm (Other on request)
 - Temperature Sensor (PT100)
- Requires main control unit supplied in separate JBX or Cabinet (CABTEC)



SONDATEC: "S" SERIES CONFIGURATION

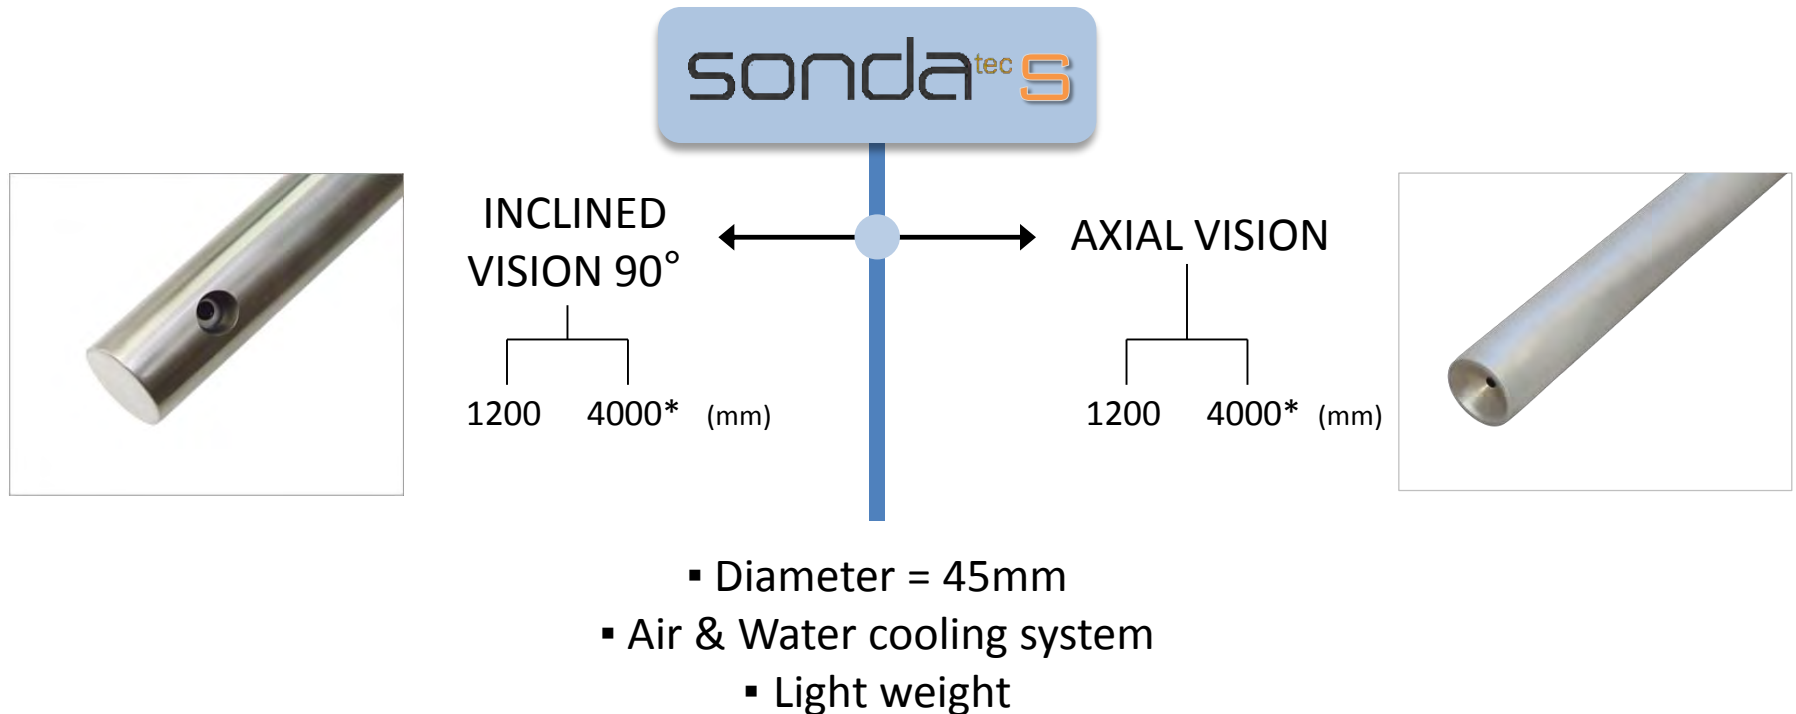

"S" series has been developed for all applications that require a small entrance diameter. Thanks to this feature it is also ideal for mobile inspections.



CABTEC: "S" SERIES CONFIGURATION

cab^{tec}

- Hydraulic, pneumatic and electrical controls in two segregated units

- Special trolley for easy movements and mobile inspections

- Alarm control for camera's over temperature
- Alarms status on LCD display on cabinet

- Main unit of control camera
- Temperature camera sensor management

